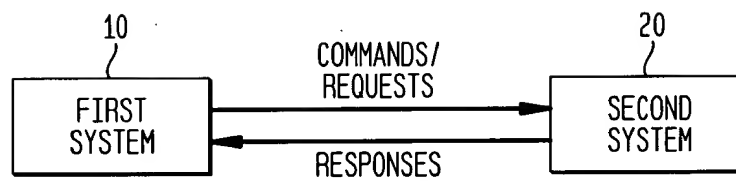


**FIG. 1**  
(PRIOR ART)



**FIG. 2**

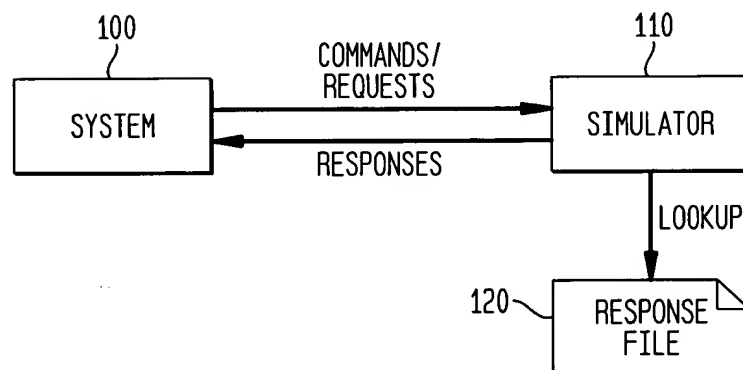


FIG. 3A

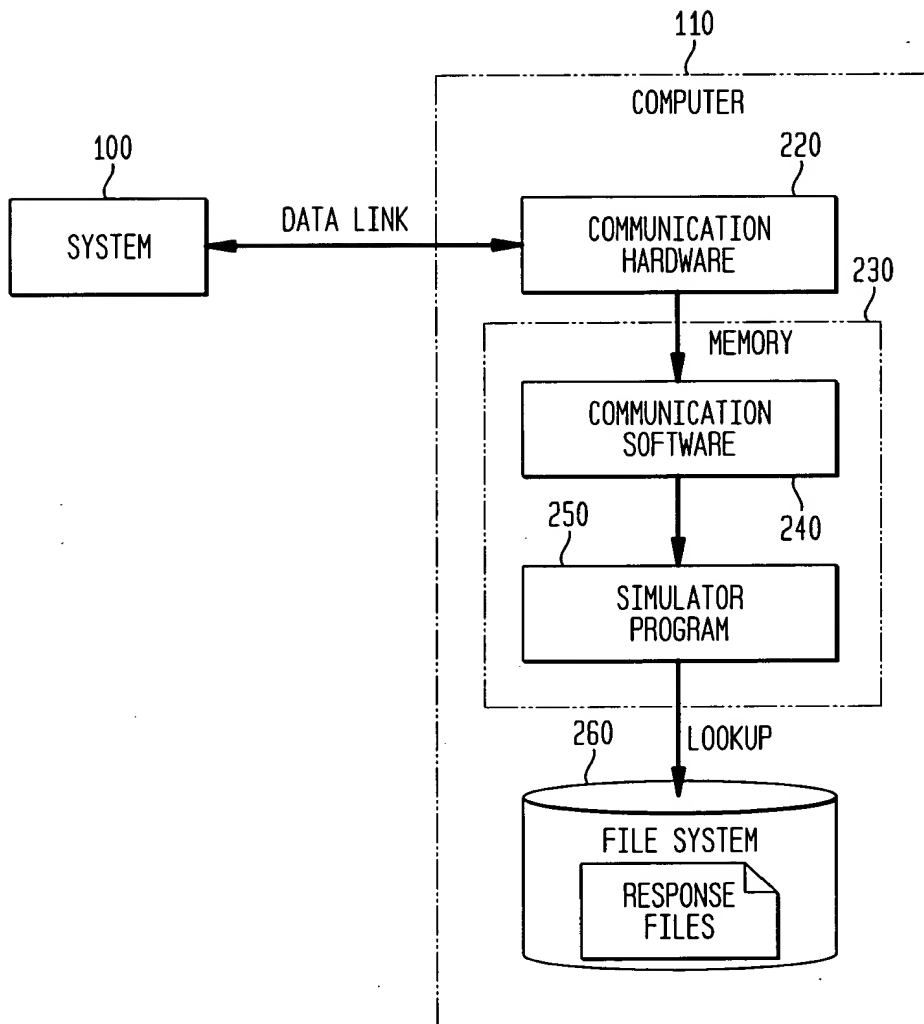
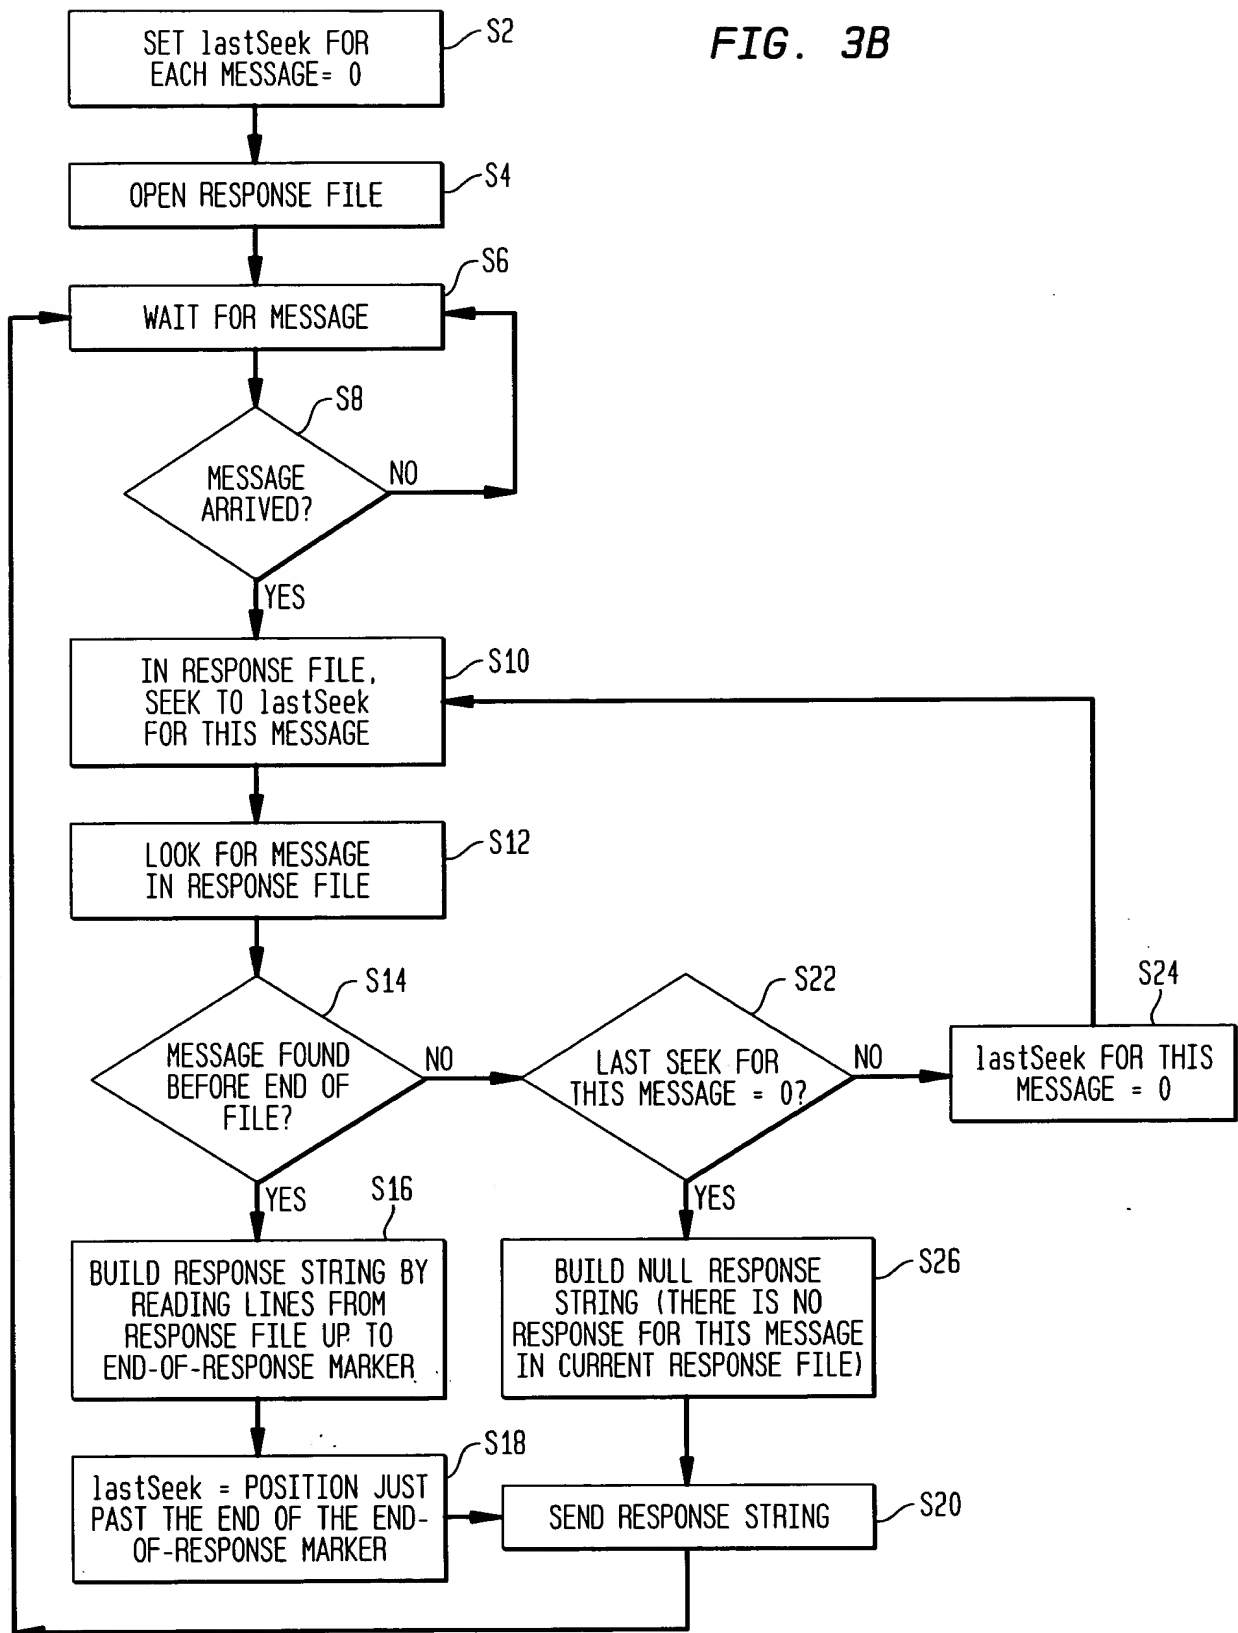


FIG. 3B



*FIG. 3C*

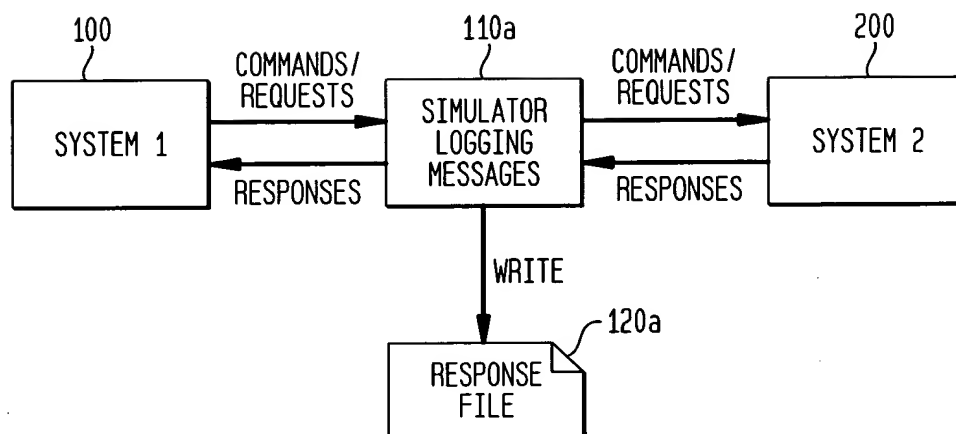
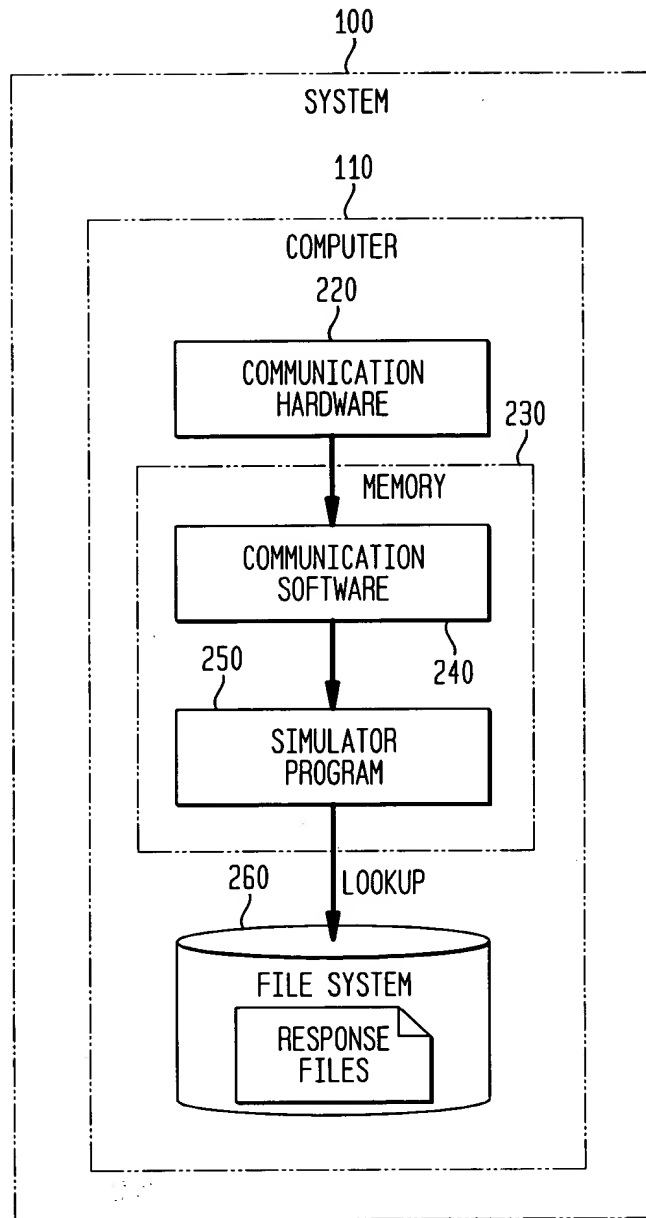


FIG. 4A



**FIG. 4B**

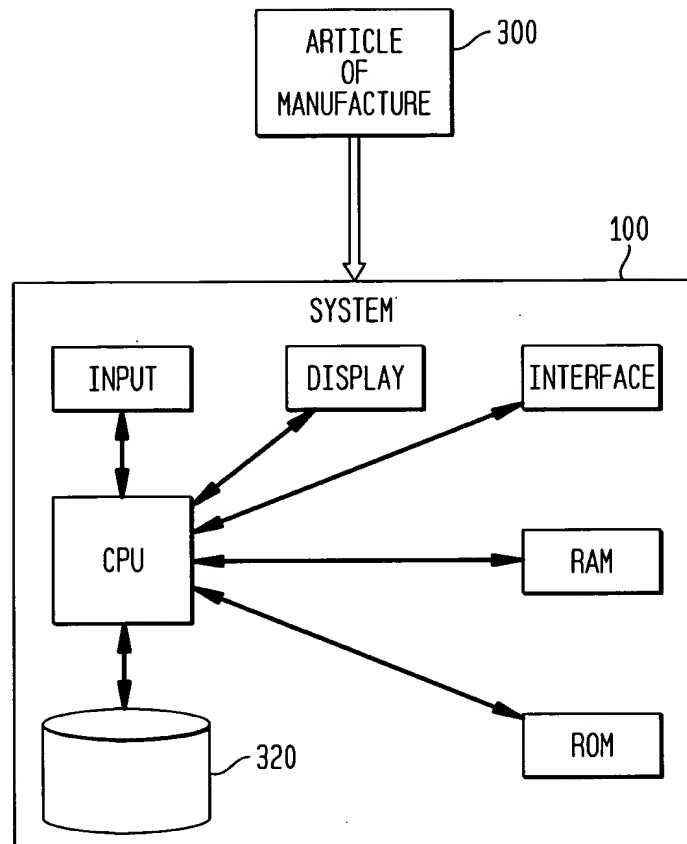


FIG. 5

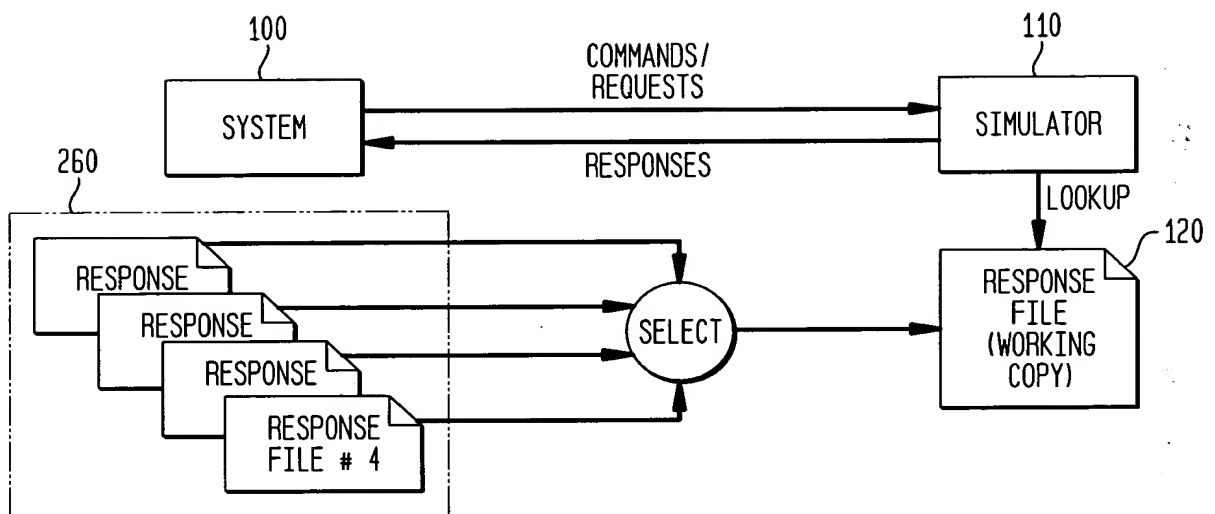


FIG. 6

300

SimpleSim Options

Message Marker 310

Send Message Marker ☒ 320

End Message Marker 330

Send End Message Marker ☒ 340

Response File 350

D:\Apwg\1VB5\1wizgen\SimplerWiz\SocketSimpleSim\responses.txt

Change Response File 360

Cancel 370

OK 380



FIG. 7

400

The image shows a screenshot of a software application window titled "SimpleSim". The window has a standard Windows-style title bar with minimize, maximize, and close buttons. Below the title bar, there are two menu items: "Options" and "Monitor". The main content area is divided into several sections. The first section is titled "Socket Communications" and contains two input fields: "Host" with the value "nj0117pgillis.wh.lucent.com" and "Port" with the value "2300". The second section is titled "Status" and contains a large text area displaying "Listening". Below the status section, there are two labels: "Received:" followed by an empty text box, and "Sent: 0". At the bottom of the window, there are three buttons: "Start Sim", "Stop Sim", and "Quit". To the left of the "Start Sim" button is a checked checkbox labeled "IL1 Server". Various reference numerals are placed around the interface: "400" points to the title bar, "440" points to the status section, "410" points to the "Start Sim" button, "420" points to the "Stop Sim" button, and "430" points to the "Quit" button.

SimpleSim

Options Monitor

Socket Communications

Host nj0117pgillis.wh.lucent.com

Port 2300

Status

Listening

Received: Sent: 0

Start Sim Stop Sim Quit

☒ IL1 Server

FIG. 8

500

